

720 / 727 Pressure Regulator

720 and 727 Pressure Regulators were designed to support inlet pressures up to 28 bar, and regulate outlet pressures between 0.015 bar and 2.5 bar.

727 Model has protection against excess in the outlet regulated pressure and a manual reset blocking system (shut off device).

The connections to pipe can be 1" BSP threaded (NPT upon request) or 1" Flanged (ANSI S150 and ANSI S300), and can be indifferently connected to horizontal or vertical pipes.

Four models of this type are manufacturing, depending on the regulated pressure:

- 727 / 720 - 1: up to 0.08 Bar
 - 727 / 720 - 2: from 0.05 to 0.9 Bar
 - 727 / 720 - 3: from 0.7 to 1.1 Bar
 - 727 / 720 - A : from 1.0 to 2.5 Bar
- All of them support input pressures of up to 28 Bar.



TECHNICAL DATA

CONNECTIONS:

Threaded 1" BSP (1" NPT upon request)

Flanged 1" ANSI S150

Flanged 1" ANSI S300

OPERATING TEMPERATURE: -20 °C to 60

SECURITY LOCK: high pressure closing / low pressure closing (on request)

MATERIALS

MAIN BODY:

Nodular cast iron A536 65/45/12 /ASTM

A-216 WCB Steel

Nodular cast iron A536 65/45/12

Steel ASTM A-216 WCB

ACTUATOR: Aluminum


INTERNAL: Brass

DIAPHRAGM AND SHUTTER: Nitrile

Models 720M and 727M operate with a control line (1/4" NPT connection) for monitoring other valves or devices.

DIMENSIONS

CONNECTION STYLE	A	B	C	D	E	F	Weight (kg)	
							720	727
1" Threaded	268	66	130	205	56	183	3.9	4.5
1" Flanged S150	268	92	184*	232	56	183	5.2	5.8
1" Flanged S300	268	66	197*	205	68	195	5.9	6.4

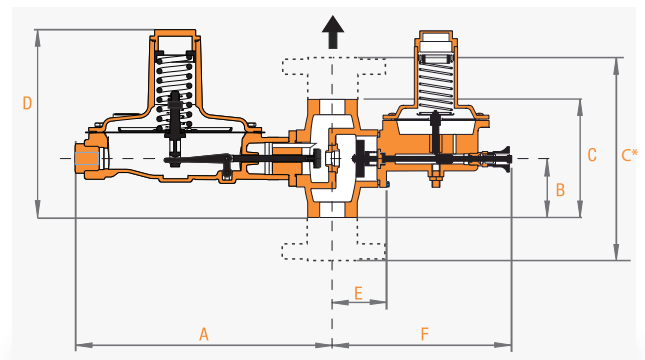

Capacity chart for natural gas

In Nm³/h (specific gravity 0.6 - droop 10%)*



Type 720/727						
Outlet pressure [mbar]	Inlet pressure [bar]	Ø orifices [mm]				
		3,2	4,8	6,4	9,5	12,7
15	0,140	2	2	3	8	10
	0,35	2	2	12	14	18
	0,5	3	3	14	20	24
	1	8	14	20	26	36
	1,5	14	16	24	32	38
	2	16	18	24	36	40
	2,5	20	20	30	38	-
	3,5	22	22	32	38	-
	5	24	24	32	-	-
	7	32	32	38	-	-
10	36	36	38	-	-	
20	0,140	2	2	3	8	10
	0,35	2	2	12	14	18
	0,5	4	6	14	20	24
	1	8	14	20	26	36
	1,5	14	16	24	32	40
	2	16	18	24	36	42
	2,5	22	22	30	38	-
	3,5	26	26	34	38	-
	5	28	28	36	-	-
	7	34	34	38	-	-
10	34	38	38	-	-	
30	0,140	2	3	3	8	10
	0,35	4	4	12	14	18
	0,5	4	10	16	20	24
	1	8	14	22	26	36
	1,5	14	16	24	32	40
	2	16	20	26	36	44
	2,5	22	24	30	38	-
	3,5	26	26	34	38	-
	5	28	28	36	-	-
	7	34	34	38	-	-
10	38	38	38	-	-	
50	0,140	2	3	3	8	10
	0,35	4	5	12	14	18
	0,5	4	10	16	20	24
	1	10	14	22	26	36
	1,5	14	16	30	32	40
	2	18	20	32	36	44
	2,5	22	24	38	38	-
	3,5	26	26	38	38	-
	5	28	28	46	-	-
	7	34	34	50	-	-
10	38	38	60	-	-	
80	0,140	2	3	3	8	10
	0,35	4	5	12	16	18
	0,5	4	12	18	20	24
	1	10	16	22	28	36
	1,5	14	24	30	38	40
	2	18	30	32	40	44
	2,5	22	35	38	44	48
	3,5	28	38	40	48	48
	5	38	46	46	48	48
	7	44	48	48	48	48
10	46	60	60	60	60	

*For types 720M / 727M ask our sales offices

*For inlet pressures greater than 10 bar, ask our sales offices

The information contained in this brochure is subject to change without notice.

DISTRIBUTOR

Type 720/727							
Outlet pressure [mbar]	Inlet pressure [bar]	Ø orifices [mm]					
		3,2	4,8	6,4	9,5	12,7	
180	0,5	4	4	14	20	24	
	1	10	18	24	28	36	
	1,5	14	24	32	38	46	
	2	18	30	38	42	46	
	2,5	22	36	46	52	58	
	3,5	28	42	54	60	70	
	5	38	46	60	66	78	
	7	44	65	65	70	102	
	10	46	70	70	70	102	
	350	0,5	-	-	11	16	17
1		10	18	24	32	36	
1,5		14	22	36	38	46	
2		16	30	42	42	46	
2,5		22	34	52	52	58	
3,5		28	44	60	64	76	
5		34	50	66	72	90	
7		42	66	70	76	124	
10		46	70	70	80	124	
700		1	-	14	16	22	28
	1,5	14	20	24	32	38	
	2	16	24	34	42	46	
	2,5	22	26	34	50	58	
	3,5	26	38	44	66	76	
	5	34	42	62	72	88	
	7	38	58	73	80	124	
	10	46	70	80	95	124	
	1000	2	20	22	36	42	58
		2,5	20	24	46	54	67
3,5		26	38	54	66	80	
5		36	42	70	80	100	
7		42	58	78	105	135	
10		52	70	90	120	145	
1500		2,5	16	22	31	38	64
		3,5	22	32	38	55	78
		5	30	38	56	72	95
		7	38	58	64	97	125
	10	42	60	74	115	140	
	2000	2,5	10	15	20	25	55
		3,5	22	28	39	44	74
		5	28	38	55	66	90
		7	36	54	76	92	115
		10	42	60	82	110	130
2500		3,5	-	26	36	44	70
		5	26	36	55	66	85
		7	36	55	70	92	100
10		42	60	76	105	125	

To calculate capacities with other gases, multiply K factor from the following chart.

GAS	SPECIFIC GRAVITY	K FACTOR
Butane	2	0.55
LPG	1.5	0.63
Carbonic anhydride	1.5	0.63
Oxygen	1.1	0.74
Air	1	0.77
Nitrogen	0.97	0.79
Acetylene	0.9	0.82
Ammonia	0.59	1.02
Hydrogen	0.07	3
Biogas*	máx 1.2	0.7
	mín 0.8	0.75

*The proper operation is guaranteed only for treated Biogas (Low content of sulfur)